




IGLU

STOTELĖS PRIJUNGIMO INSTRUKTAŽAS

Susikūrus stotelę mūsų programėlėje, gautus duomenis reikės susivesti savo stotelės programėlėje.

1. Prisijungus prie to pačio Wifi tinklo kaip ir stotelė, nueikite į <http://charger.local>
2. Iš meniu pasirenkame **Override OCPP Server**

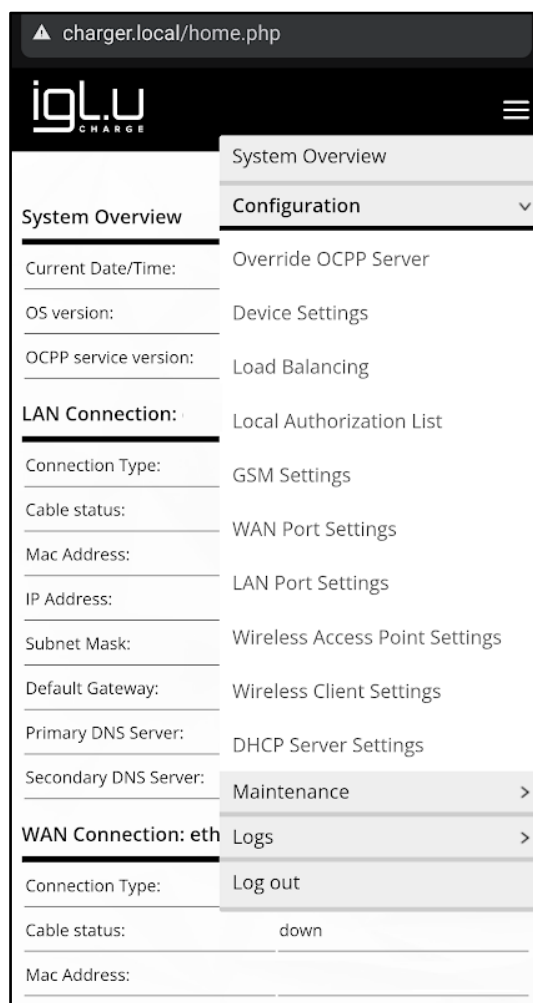



3. Atsidariusiame meniu suveskite `wss://ocpp.circlelink.app/`

charger.local/Configuration-CaptainSei

iG.L.U.
CHARGE

Configuration / Override OCPP Server

This setting allows faster configuration of the OCPP server URL for all charge points connected to this Coordinator. It ensures that all devices share the same base URL. Additionally, it allows new assistant devices to connect to the OCPP backend without requiring additional configuration.

Note: According to OCPP-J specification, a charge point derives its connection URL by appending the configured URL with "a string uniquely identifying the Charge Point". This string is configurable via "ChargePointIdentity" parameter. However, some OCPP backend implementations may require assigning a unique URL that does not comply with this requirement. In such cases, the ChargePointIdentity (in all charge points) should be set to an empty string. In such scenario, overriding the OCPP server for all devices may not function correctly, as each charge point will be connecting under the same URL.

Override OCPP Server for ☒

all devices:

OCPP Server URL:

4. Pasirikite **Device Settings** menu punktą, pasirenkite įrenginį iš sąrašo ir paspauskite **Read**

charger.local/Configuration-Device.ph

iG.L.U.
CHARGE

Configuration / Device Settings

To make configuration changes, select one device and use the "Read" function to view the current configuration. After making changes, use the "Write" function to apply the new configuration. An asterisk(*) preceding device id indicates pending configuration changes which can be cleared using the "Discard" function. **Note:** device configuration changes take effect after system reboot or OCPP service restart via functions available in the "Maintenance" section of the menu.

Select All

Select None



5. Ties **ChargePointIdentity** suvedame **ChargerID**, gautą iš mūsų programėlės

charger.local/Configuration-Device.php

iglu
CHARGE

Configuration / Device Settings

To make configuration changes, select one device and use the "Read" function to view the current configuration. After making changes, use the "Write" function to apply the new configuration. An asterisk(*) preceding device id indicates pending configuration changes which can be cleared using the "Discard" function.
Note: device configuration changes take effect after system reboot or OCPP service restart via functions available in the "Maintenance" section of the menu.

Select All Select None

500

Read Write Discard

Key	Value
ServerUrl	wss://ocpp.iglutech.e
ChargePointIdentity	U00
PowerSupplyInputMaximumCurrent	16
PowerSupplyInputPhaseRotation	× 0.Unknown
FreeCharging	false