




ELINTA

STOTELĖS PRIJUNGIMO INSTRUKTAŽAS

1. Prisijunkite prie <https://elios.cloud/>

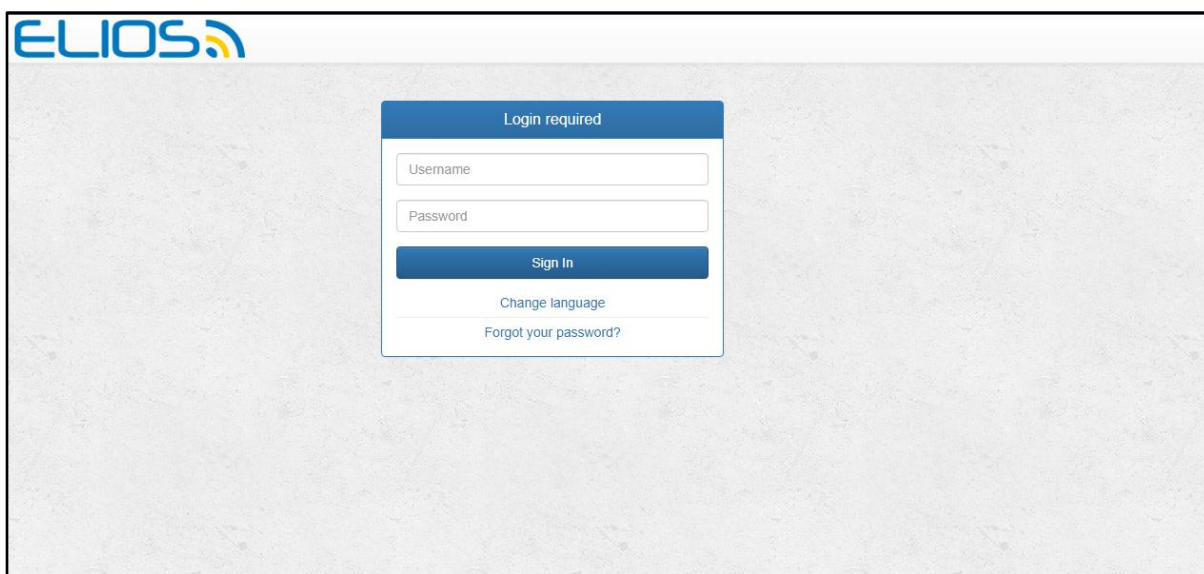

ELIOS

Login required

Username


Password

Sign In

Change language

Forgot your password?

2. Nueikite į „Stations“ sekciją

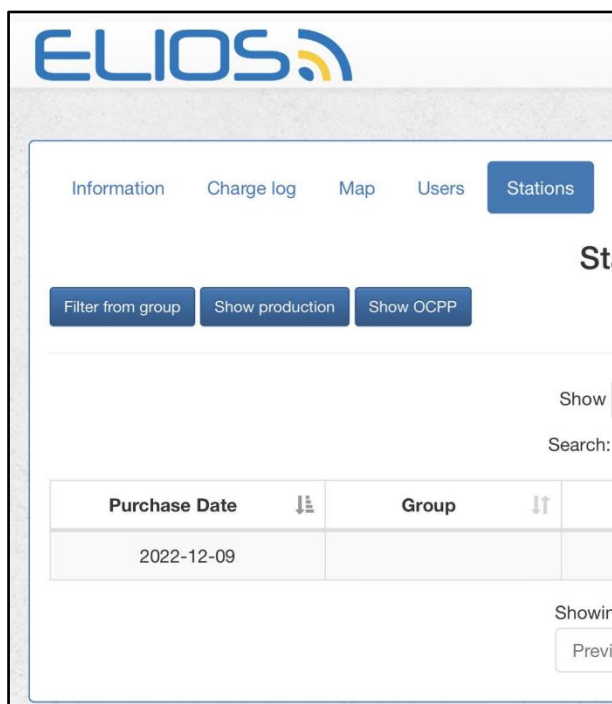

ELIOS

Information Charge log Map Users Stations

Filter from group Show production Show OCPP

Search:

Purchase Date	Group
2022-12-09	

Showing

Previous



3. Pasirinkite savo stotelę

Information of HomeBox Slim

Information

Hardware

Charge log

Console

Schedule

Balancing

Edit

Creation dates

-

2022-12-09 10:38

Charge total

127d 12h 52m 43s

7190.64 kWh

Commands

Authorize

Flush

Reboot

TYPE 2 (A)

Ready

Not charging

00:00:00

0.00 kWh

Start

Disable

TYPE 2 (B)

Disabled

Not charging

00:00:00

0.00 kWh



4. Paspauskite Edit

Information of HomeBox Slim Povilas

Information

Hardware

Charge log

Console

Schedule

Balancing

Edit

Production Id

Purchase date

2022-12-09

Market

Rest of the world

Name

HomeBox Slim

Group

Latitude

0

Longitude

0

Operation Mode

Private



5. Apačioje pasirinkite OCPP 1.6J ir ties OCPP URL suveskite wss://ocpp.circlelink.app:443/ChargerID. Čia ChargerID – kodas, gautas iš mūsų programėlės. Nepamirškite paspausti „Save“

0

Operation Mode

Private

Reservations

Disabled

Phase rotation

Phases not rotated

Start Mode

When car connected

Stop Mode

When car unplugged

Color Preset

Blue

Updates

Approved updates nightly

OCPP Version

OCPP-J 1.6 PTCPAY

OCPP URI

wss://ocpp.circlelink.app:443/U001

Save

Delete

Close